



StreamDSP LLC
1733 W. Lane Ave.
Columbus, OH 43221 USA
(855) DSP-FPGA <http://www.streamdsp.com>
email: sales@streamdsp.com

IP Datasheet

Serial FPDP Gen3 for Intel, Xilinx, and Microsemi FPGAs


Serial Front Panel Data Port Gen3 is a next-generation, high bandwidth serial communications protocol defined by the ANSI/VITA 17.3-2018 standard. sFPDP-Gen3 supports single-lane or multi-lane links with automatic channel bonding and uses a 64B/67B framing layer to achieve over 95% bandwidth efficiency. sFPDP-Gen3 supports the same user data frame types found in the previous VITA 17.1 specification, allowing for easy system upgrades. Serial FPDP Gen3 is ideal for use in applications such as high-speed communication system backplanes, high-bandwidth remote sensor systems, signal processing, data recording, and high-bandwidth video systems. sFPDP can be used in point-to-point or loop topologies, uni-directional or bi-directional links, and easily supports different types of data with efficient and flexible data framing options.

StreamDSP is committed to performance, efficiency, and flexibility. Our sFPDP core is unique in that we support nearly all transceiver-based devices from Intel/Altera, Xilinx, and Microsemi. We're always making improvements to the core and adding support for new FPGA device families. Our core provides an open interface to the FPGA transceiver, giving the user complete control over transceiver speed, settings and adjustments. A complete reference design is provided for each family, as well as a thorough testbench with support for Riviera and ModelSim tools. In addition, our testing procedure includes exhaustive interoperability testing among all FPGA families and manufacturers to ensure compatibility.

Features

- ✓ VITA 17.3-2018 Compliant
- ✓ Multi-lane channel bonding support
- ✓ 64B/67B Framing Layer
- ✓ Independent data / system clock domains
- ✓ Optional flow control and CRC24
- ✓ 64-bit user data interface
- ✓ Basic control/status interface
- ✓ Local and Far-End Link status
- ✓ Local UDB CRC24 validation
- ✓ Unidirectional and bidirectional support
- ✓ All sFPDP frame types supported
 - Unframed data
 - Single frame data
 - Fixed size repeating frame data
 - Dynamic size repeating frame data
- ✓ All sFPDP system configurations
 - Basic System
 - Flow Control
 - Bidirectional Data Flow


Protocol Link Layer

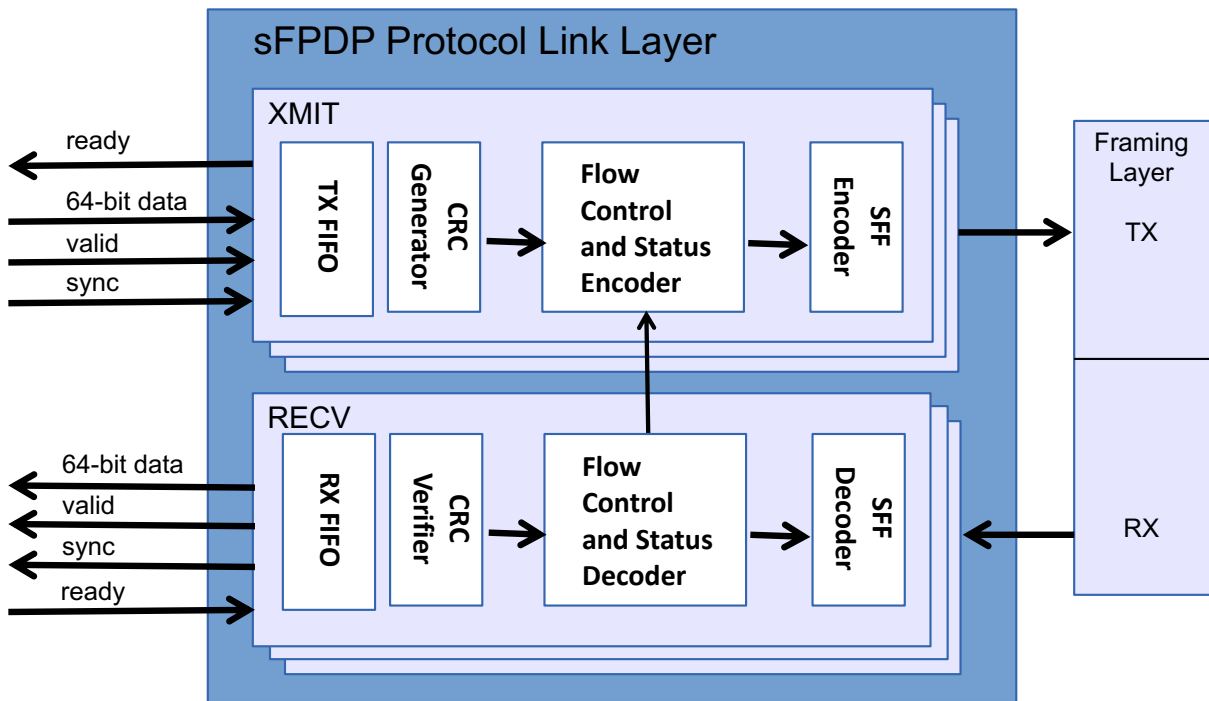

The sFPDP-Gen3 Protocol Link Layer accepts data from the user and implements the dual-clock domain transfer FIFOs and Serial Fiber Frame (SFF) encoding. The user data interface is 64-bits per lane, and the IP supports automatic flow control. User data is encoded/decoded into valid sFPDP Serial Fiber Frames (SFFs) based on the user's requested framing type and is sent to the Framing Layer for encapsulation into the Payload section of the Meta-Frame. Optional CRC24 is calculated to generate User Data Block (UDB) ACK_GOOD and ACK_BAD status flags to allow for guaranteed delivery mechanisms.

IP Datasheet

Framing Layer

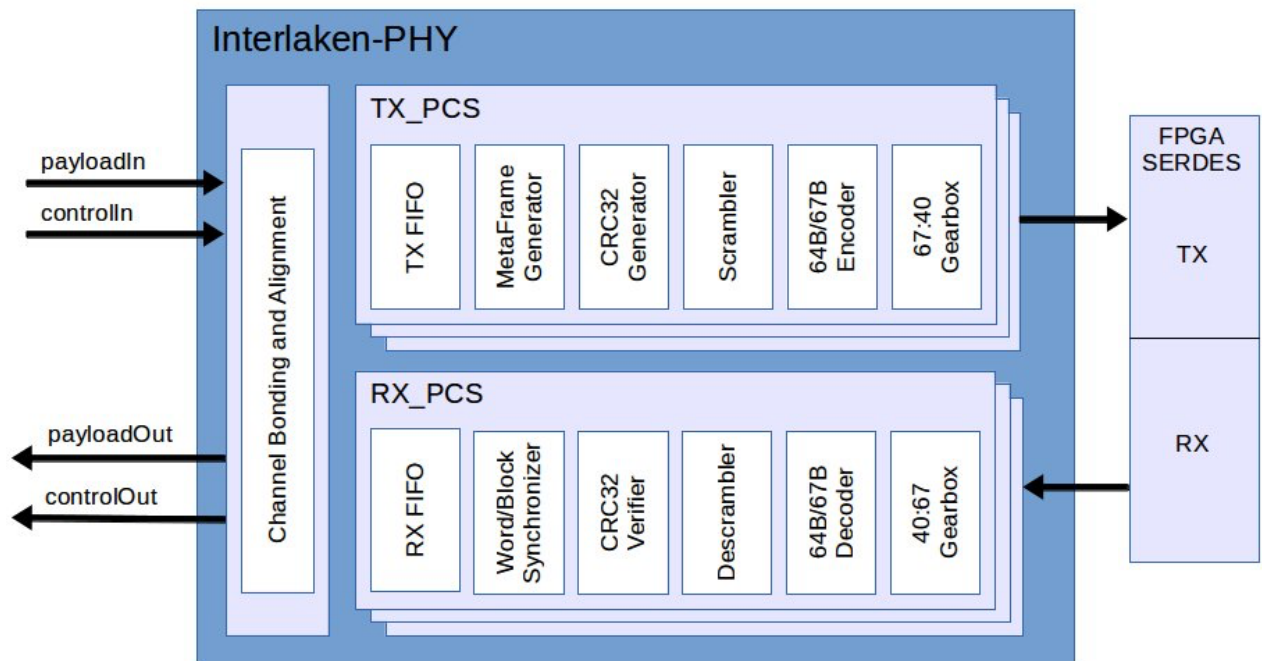

The sFPDP-Gen3 Framing Layer implements the 64B/67B Framing Layer defined by the Interlaken v1.3 specification. The Framing Layer supports single-lane and multi-lane channel bonding with automatic link synchronization. A per-lane CRC32 is calculated in order to guarantee link integrity and assist with channel diagnostics. The Framing Layer exchanges data between the sFPDP Protocol Link layer and the FPGA transceiver(s).

FPGA Family Support

ALTERA

- Arria 5 GX
- Stratix 4 GX
- Stratix 5 GX
- Cyclone 10 GX
- Arria 10 GX
- Stratix 10 GX
- Agilex F-File
- Agilex E-File
-

Example Design

Altera Arria-V GX Starter Development Kit
Altera Stratix-IV GX PCIe Development Kit
Altera Stratix-V GX PCIe Development Kit
Intel Cyclone-10 FPGA Development Kit
Intel Arria-10 GX FPGA Development Kit
Intel Stratix-10 GX FPGA Development Kit (L-Tile, H-Tile, E-Tile)
Intel Agilex I-Series FPGA Development Kit
Intel Agilex F-Series FPGA Development Kit

XILINX

- Virtex-6 LXT
- Virtex-7 GTH
- Virtex-7 GTX
- Artix UltraScale+ GTY
- Artix-7 GTP
- Kintex-7 GTX
- Kintex UltraScale GTH
- Virtex UltraScale GTH/GTY
- Virtex Ultracale+ GTY
- Kintex UltraScale+ GTH
- Zynq UltraScale+ MPSoC
- Zynq UltraScale+ RFSoc
- Versal ACAP GTY
- Versal ACAP GTM

Xilinx ML605 Development Kit
Xilinx VC709 Evaluation Kit
Xilinx VC707 Evaluation Kit
phantom board
Xilinx AC701 Development Kit
Xilinx KC705 Development Kit
Xilinx KCU105 Development Kit
Xilinx VCU108 Development Kit
Xilinx VCU118 Development Kit
Xilinx KCU116 /development Kit
Xilinx ZCU102 MPSoC Development Kit
Xilinx ZCU111 RFSoc Development Kit
Xilinx VCK190 Evaluation Board
Xilinx VPK120 Evaluation Board

MICROSEMI

- PolarFire

Arrow Everest PolarFire Development Kit

All deliveries include VHDL and Verilog simulation models, a self-checking testbench with simulation scripts, and ready-to-run design targeted at a popular development board for each family (listed above).

*** Additional FPGA families are actively being worked on. Our goal is to support ALL transceiver-based FPGA families. If you need support for an FPGA family not listed above, please let us know ASAP as we can help prioritize our rollout schedule for you!